

# LED gear DEEP DIM 350mA-500mA-700mA 20W DALI

11630030-11630130-11630230

Diagram



## Operating Mode

- Features DALI deep dimming (0.1% - 100%):
  - memory function for sets or light groups
  - recall of stored functions
  - compatible with standard DALI interfaces
  - DALI-2 approved
- Hybrid dimming (AM+PWM)

## Rated Voltage

220 ÷ 240 V

## Frequency

47...53 Hz

## AC Operation range

198 ÷ 264 V

## DC Operation range

none

## Power

0 ÷ 20 W

## Temperature

Tc = 80°C



Ta = -20...+50°C

## Efficiency at full load


80%

## Maximum drivers on MCB 16A type B


106

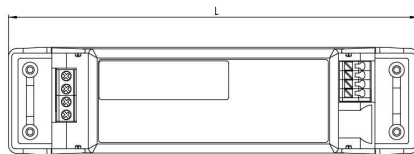

L 160mm  
W 41.5mm  
H 30.5mm



## For serial connection, respect polarity!

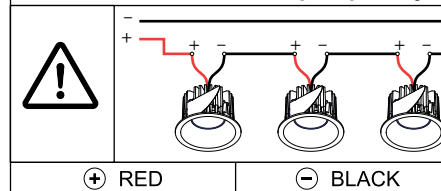

## CAN BE USED WITH

Fixtures:

see driver matrix - latest version on website  
[www.supermodular.com](http://www.supermodular.com) or check sales contact

