



### **Luce Orizzontale S1** NEW

Designed by Ronan & Erwan Bouroullec, 2022


110W - 5345lm - 2700K - CRI> 95

Suspended lamp consisting of interconnected glass modules that reach a length of 1.66 mt. (S1) 2.07 mt. (S2) 2.49 mt. (S3) with 2.70 m suspended power cable. The cylindrical transparent glass modules are created through an artisanal process by pouring the glass into a rotating mold to obtain an exclusive finish that makes each single piece unique. Internal structure in polished extruded aluminum equipped with two linear LED modules for direct and indirect lighting downwards. The modules can be easily removed and replaced in case of maintenance. The power supply unit and the Dali Dimmer are located within the ceiling rose while a touch control button, positioned on one end of the product, allows the luminaire to be controlled in three different modes. Control options available: TOUCH\_ Features direct control via the touch button on the lamp. This option allows to dim and adjust the light intensity of both the up and down emission (individually or combined) from 10% to 100%. PUSH&TOUCH\_Features remote on/off control via Push button as well as dim and adjustability of the light tensity of both the up and down emission (individually or combined) from 10% to 100% through the touch button integrated on the lamp. DALI&TOUCH\_ Features remote on/off control via DALI DT6 as well as dim and adjustability of the light tensity of both the up and down emission (individually or combined) from 10% to 100% through the touch button integrated on the lamp.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT





# Download Mounting instructions ♣ PDF

## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class **F** 

#### Main specifications

Mounting	Suspension		
Environments	Indoor dry location		
Light Source Type	LED		
LED type	LED Module		
Number of heads	1		
Power (W)	110		
System flux (lm)	5345		

#### Physical

Glass
1656
3900
78
900
61
27.95
0
0
0
0.18
20
20


















#### Photometric

Lighting type		
Light distribution		
CCT (K)	2700	
CRI>	95	

#### Electrical

Insulation class	I	
Frequency (Hz)	50/60	
Main voltage (Vac)	100-240	
LED voltage Vf (Vdc)	null	
LED current (mA)	500	
Driver	Integrated	
Dimmable	Yes	
Dimming type	Dimmer on board	
Dimming interface	Dimmer Integrated	

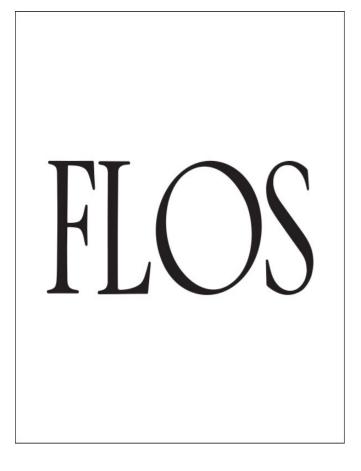

10.	Assembly Driver fot Luce	RF32976
	Orizzontale	
20.	Assembly Dimmr Rose for Luce	RF32977
	Orizzontale	
30.	Led Board for Luce Orizzontale	RF3746700
	S1	
40.	Suspensión Ring Wiring 4m for	RF3746200
	Luce Orizzontale	
50.	Closed Glass Difusser for Luce	RF3746300
	Orizzontale	
60.	Open Glass Difusser for Luce	RF3746400
	Orizzontale	
70.	Linear Difusser Luce Orizzontale	RF3746500
	S1	
80.	Rose for Luce Orizzontale S1-S2	RF3746600
	White	
90.	Assembly Accesories for Luce	RF3746800
	Orizzontale S1	



RF32976 Assembly Driver fot Luce

Orizzontale



Assembly Dimmr Rose for Luce
Orizzontale

FLOS

Led Board for Luce Orizzontale

FLOS

RF3746200

Suspensión Ring Wiring 4m for Luce Orizzontale

FLOS

F3746300

Closed Glass Difusser for Luce Orizzontale FLOS

RF3746400

Open Glass Difusser for Luce Orizzontale FLOS

T2746E00

Linear Difusser Luce Orizzontale S1 FLOS

RF3746600

Rose for Luce Orizzontale S1-S2 White



RF3746800

Assembly Accesories for Luce Orizzontale S1