



WEVER & DUCRÉ
LIGHTING

DEEPER 1.0 LED

152361Q9

Project

Type

Notities

Kwantiteit

Datum

ALGEMEEN

Plafond

Ingebouwd

Brons

IP20

Interieur

340^a tot 505^b lm

LED

2000 K - 3000 K

CRI \geq 90

L80 B50 / 50000h

4-step binning

OPTISCH

Flood

Beam angle 35°

FYSISCH

Diameter 84 mm

Height 95 mm

0.17 kg

ELEKTRISCH

excl. voeding

17 V

LED inset 5.6^a tot 8.3^b W

350 tot 500 mA

Klasse 3

Veiligheidsafstand 0.3 m

CUTOUT

Diameter 76-79 mm



Min. ceiling thickness 4 mm

Max. ceiling thickness 38 mm


Recessed depth 95 mm

^a 350mA


^b 500mA

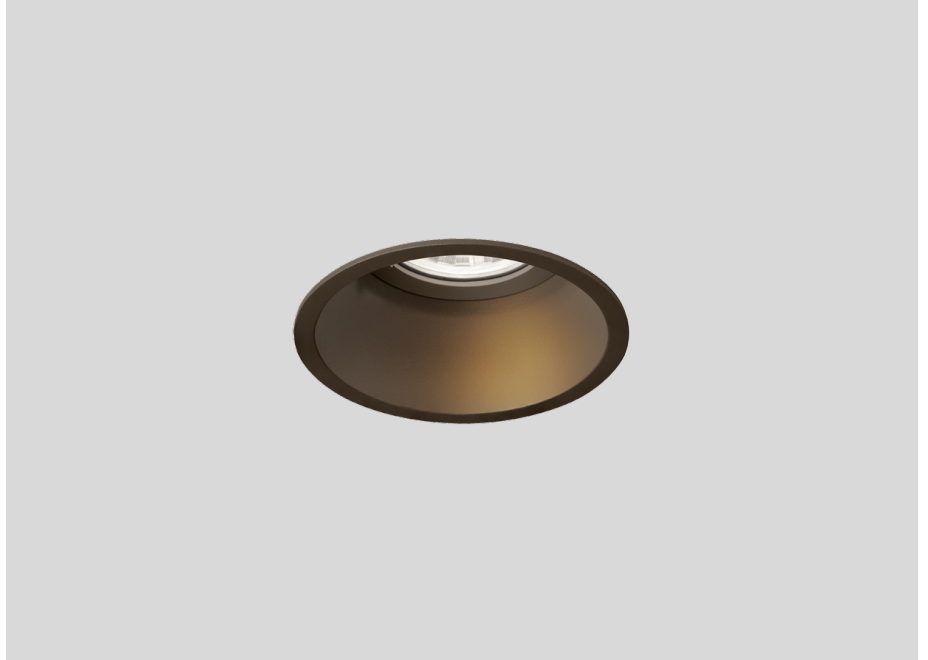

Ronde downlight van gegoten aluminium, voor plafondbouw; oppervlak Brons; natgelakt; mat glad; gereedschapsloze installatie met draadveren; geschikt voor plafonddikte van 4-38 mm; inbouwdiepte 95 mm; met COB (Chip on Board) technologie voor maximale efficiëntie; geen meervoudige schaduwen zichtbaar; lichtkleur 2000 K - 3000 K; binning initial MacAdam 4 SDCM; CRI 90; stralingshoek 35°; beschermingsgraad IP20; PC3; power supply niet inbegrepen; lichtbron vervangbaar door gekwalificeerd personeel;



LICHTVERDELING

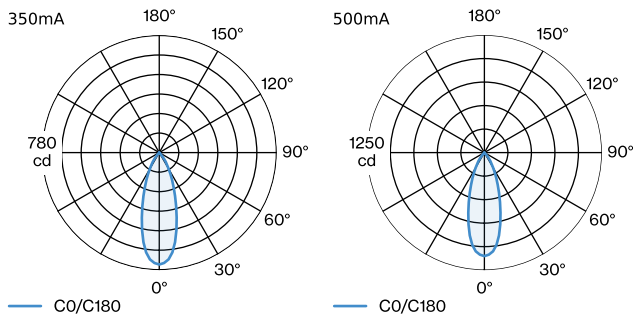



WEVER & DUCRÉ
LIGHTING

DEEPER 1.0 LED

152361Q9

KEGELDIAGRAM

flood 35° 350mA

h (m)	EO° (lx)	ø (m)
1	745	0.63
2	186	1.27
3	83	1.90
4	47	2.53
5	30	3.16

flood 35° 500mA

h (m)	EO° (lx)	ø (m)
1	1100	0.63
2	280	1.27
3	120	1.90
4	70	2.53
5	40	3.16

ELEKTRISCH

Driver

TYPE	L · W · H (MM)	ORDERCODE
10W 500mA 11-20V	100-43-23	9 0 2 1 4 4 0 5
10W 500mA 3-20V	102-49-29	9 0 2 2 4 4 0 2
17W 350mA 10-49V	108-52-22	9 0 2 4 3 6 0 1
20W 500mA 9-45V	116-40.5-22	9 0 2 4 4 6 0 4